


EMERALD

FITMENT PRESS & FIXTURES



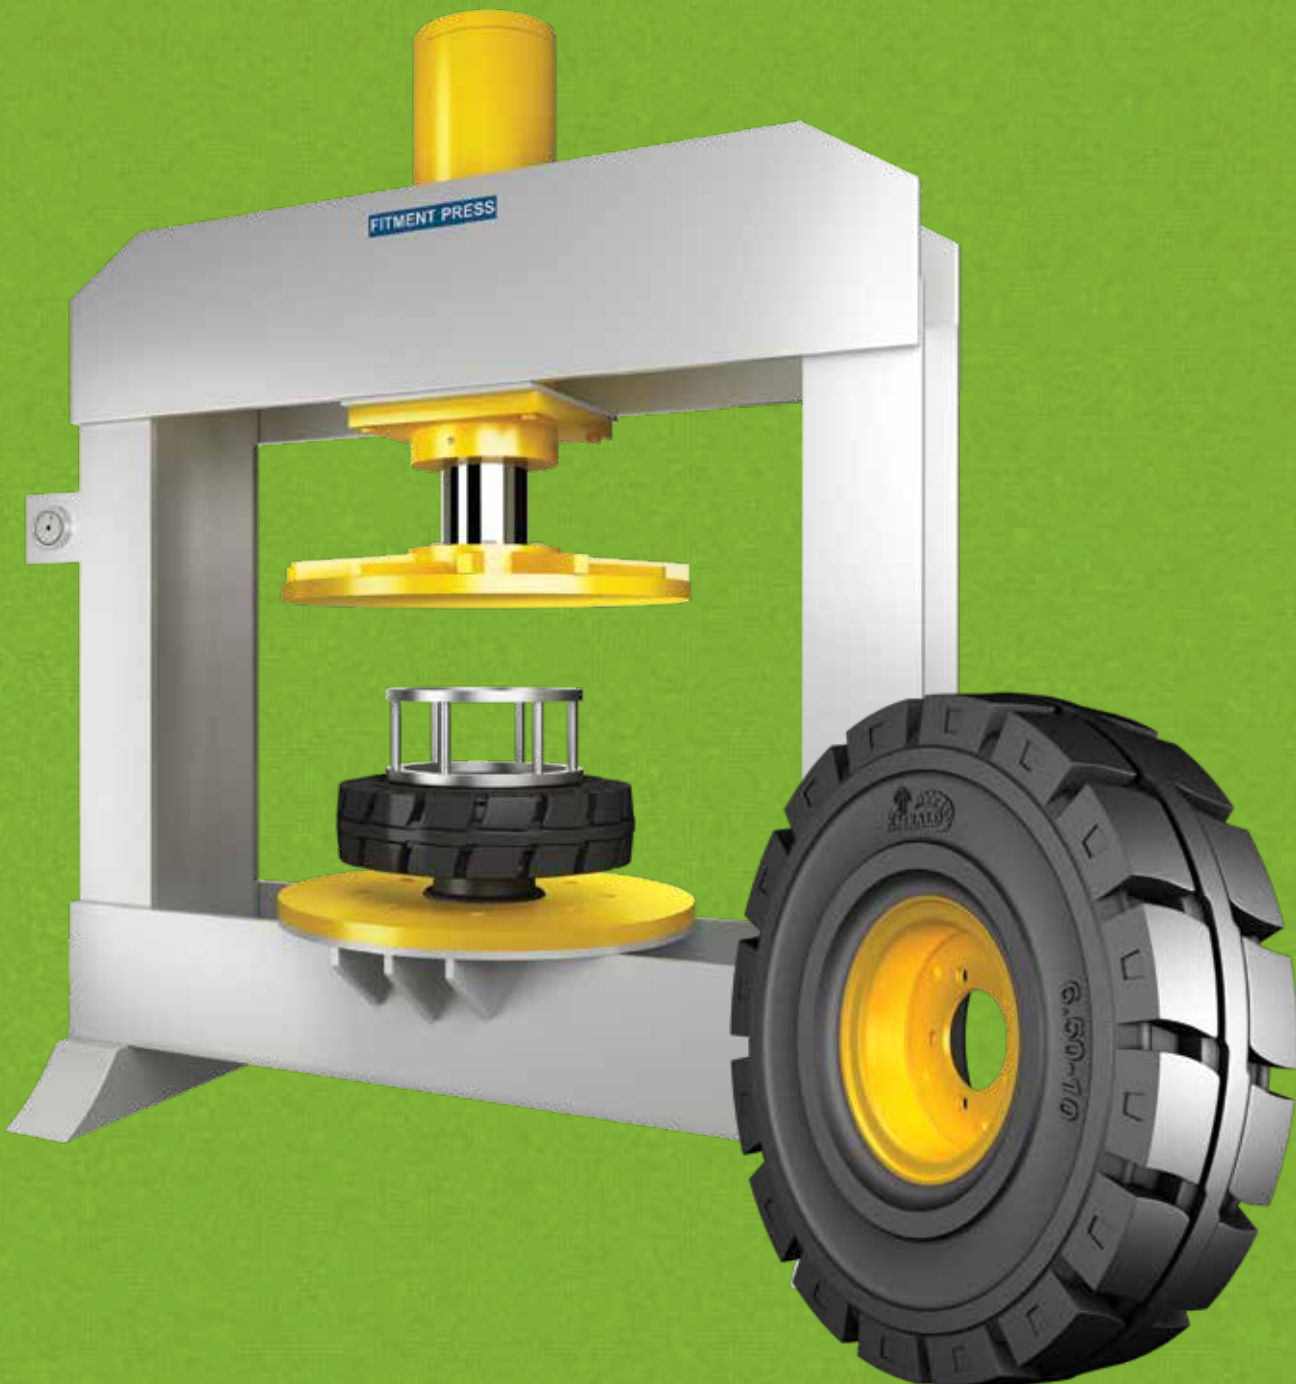

FEATURES

- Emerald offers Industrial Fitment Press for mounting and demounting of Solid Resilients from 16" to 53" OD and Press-ons from 10" to 28" OD
- Offered with a complete set of fitment fixture to ensure Easy, Safe & Secure Fitment of tyres on the rims
- Fixtures for fitment include a set of Taper Cone, Pressing Cage & Base Plate for every ID profile in Solids & Press-ons
- Available in 80/100/120/200 Tons
- Compatible to fit all popular sizes in both Solid Resilient and Press on tyres

PARAMETERS	120T FITMENT PRESS	80T FITMENT PRESS
Capacity	120 T	80 T
Construction	Fabricated H frame	Fabricated H frame
Cylinder	ø250 mm x ø150 mm x 520 mm	ø220 mm x ø150 mm x 520 mm
No. of cylinders	1	1
Stroke	400 mm	400 mm
Day light gap	820 mm	820 mm
Over all width	1650 mm	1650 mm
Table size	ø950 mm	ø950 mm
Moving plate	ø950 mm	ø950 mm
Motor	3 Phase, 7.5 HP, 415 v AC, 50 Hz	3 Phase, 5.0 HP, 415 v AC, 50 Hz
Load @ Max. Pr.	222 T	150 T
Safety	Fixed fencing at the back & Door type fencing at the front	Fixed fencing at the back & Door type fencing at the front

FITMENT FIXTURES FOR SOLID RESILIENTS



BASE PLATE



PRESSING CAGE



TAPER CONE



EMERALD RESILIENT TYRE MANUFACTURERS PVT. LTD.
 PLOT NO.2, 2ND STREET, PHASE 1
 PORUR GARDEN, VANAGARAM
 CHENNAI 600 095, INDIA
E-MAIL enquiry@emeraldtyres.com
TEL +91 44 6646 0555 / 0566
FAX +91 44 6646 0550

EMERALD MIDDLE EAST FZE
 P.O BOX 86009, RAKIA FREE ZONE
 RAS AL KHAIMAH, U.A.E.
E-MAIL info@emeraldmiddleeast.com
TEL +971 7 2433195
FAX +971 7 2433189

EMERALD TYRES EUROPE B.V.B.A.
 PATHOEKEWEG 130 C
 8000 BRUGGE, BELGIUM
E-MAIL info@emeraldtyres.com
TEL +32 50310900



SOLID RESILIENTS • PRESS-ONS • DIRECT BONDING WHEELS • PU WHEELS • INDUSTRIAL PNEUMATICS
 BUTYL TUBES & FLAPS • CONTAINER PADS • INDUSTRIAL WHEEL RIMS • FITMENT PRESS & FIXTURES

Emerald reserves the right to change the contents of this brochure without any prior notice